


PLUG POSITION (PERCENT OPEN)

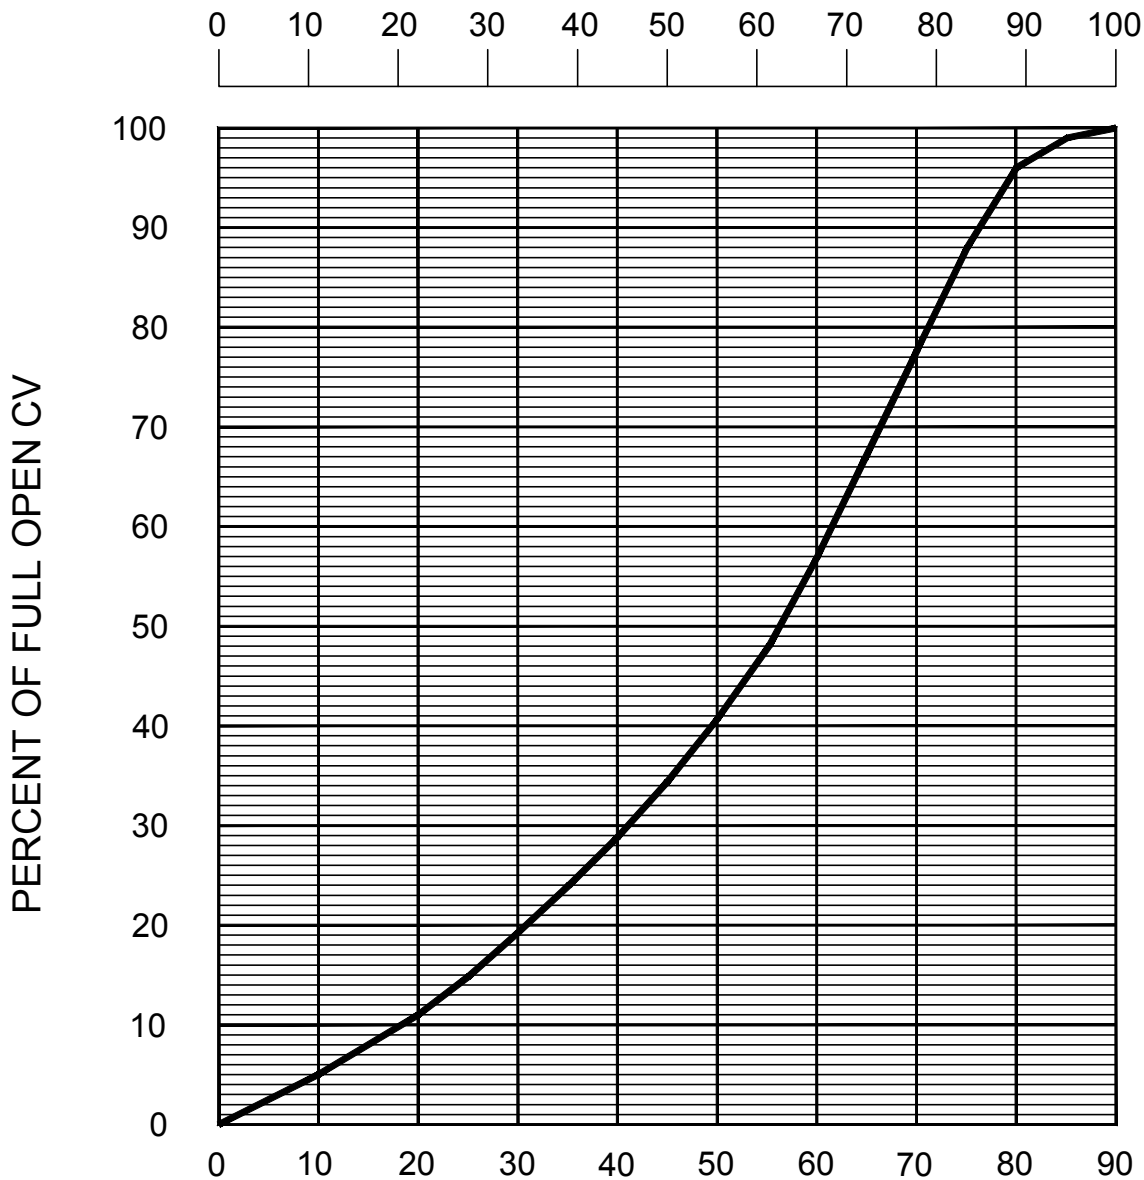

PLUG POSITION (DEGREES FROM CLOSED POSITION)

THE ABOVE GRAPH IS BASED ON INDEPENDENT LABORATORY TEST DATA.

Revised 8-21-18

SIZE	1	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20	24	30	36	42	48	54	60	66	72
5600F Cv	--	--	--	--	--	--	1,840	2,680	3,770	4,800	7,170	8,600	12,600	15,400	25,600	42,000	72,000	82,800	129,000	170,000	210,000	254,000	302,000
5800R Cv	37	94	150	240	320	570	1,200	2,070	3,250	4,750	6,150	8,050	10,200	12,600	18,100	28,300	40,700	55,400	91,650	91,650	113,000	--	--

FLOW CHARACTERISTICS OF CAM-CENTRIC® RECTANGULAR PORTED PLUG VALVES

DATE 7-22-97



VALVE AND MANUFACTURING CORP.

DRWG. NO.

SS-1394