


DISC POSITION INDICATOR

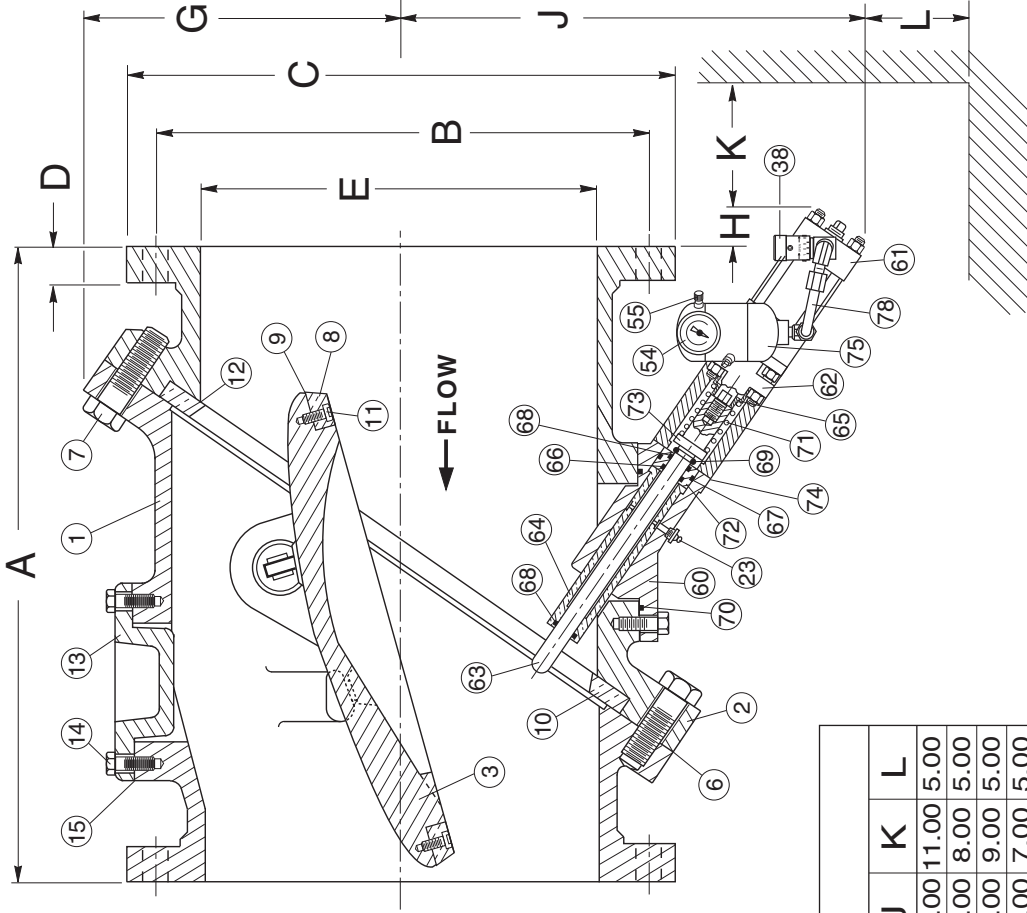

NOTES:

DIMENSIONS "K" AND "L" REPRESENT THE MINIMUM CLEARANCE REQUIRED TO REMOVE DASHPOT UNIT. HOWEVER DIMENSION "L" CAN BE REDUCED TO 1" IF SPACE REQUIREMENTS DICTATE. FOR VERTICAL FLOW UP INSTALLATION, CONSULT FACTORY.

SEE DRAWING NO. VM-9812B-M FOR ANSI CLASS 125 MATERIALS OF CONSTRUCTION.

ANSI CLASS 125

MODEL NO.	VALVE SIZE	A	B	C	D	E	F	G	H	J	K	L
12	9812B	24.00	17.00	19.00	1.25	12.00	26.00	11.00	7.00	20.00	11.00	5.00
14	9814B	30.00	18.75	21.00	1.38	14.00	29.00	12.00	4.00	21.00	8.00	5.00
16	9816B	30.00	21.25	23.50	1.44	16.00	32.00	14.00	5.00	23.00	9.00	5.00
18	9818B	33.00	22.75	25.00	1.56	18.00	36.00	15.00	3.00	24.00	7.00	5.00
20	9820B	32.00	25.00	27.50	1.69	20.00	39.00	16.00	3.00	25.00	8.00	6.00
24	9824B	38.00	29.50	32.00	1.88	24.00	46.00	19.00	1.00	27.00	4.00	6.00
30	9830B	52.00	36.00	38.75	2.13	30.00	55.00	23.00	1.00	35.00	6.00	8.00
36	9836B	59.50	42.75	46.00	2.38	36.00	65.00	27.00	5.00	39.00	2.00	8.00
42	9842B	62.50	49.50	53.00	2.63	42.00	73.00	32.00	5.00	43.00	5.00	8.00
48	9848B	65.00	56.00	59.50	2.75	48.00	82.00	37.00	2.00	52.00	8.00	8.00
54	9854B	78.00	62.75	66.25	3.00	54.00	89.00	39.00	7.00	55.00	5.00	8.00
60	9860B	87.00	69.25	73.00	3.13	60.00	99.00	42.00	7.00	64.00	5.00	8.00

Revised 8-4-16

ANSI CLASS 125 TILTED DISC® CHECK VALVE WITH BOTTOM MOUNTED OIL DASHPOT

DATE 8-12-80

DRWG. NO.

VM-9812B

VALMATIC®
VALVE AND MANUFACTURING CORP.