




WATER QUALITY
NSF / ANSI 61
2LA8

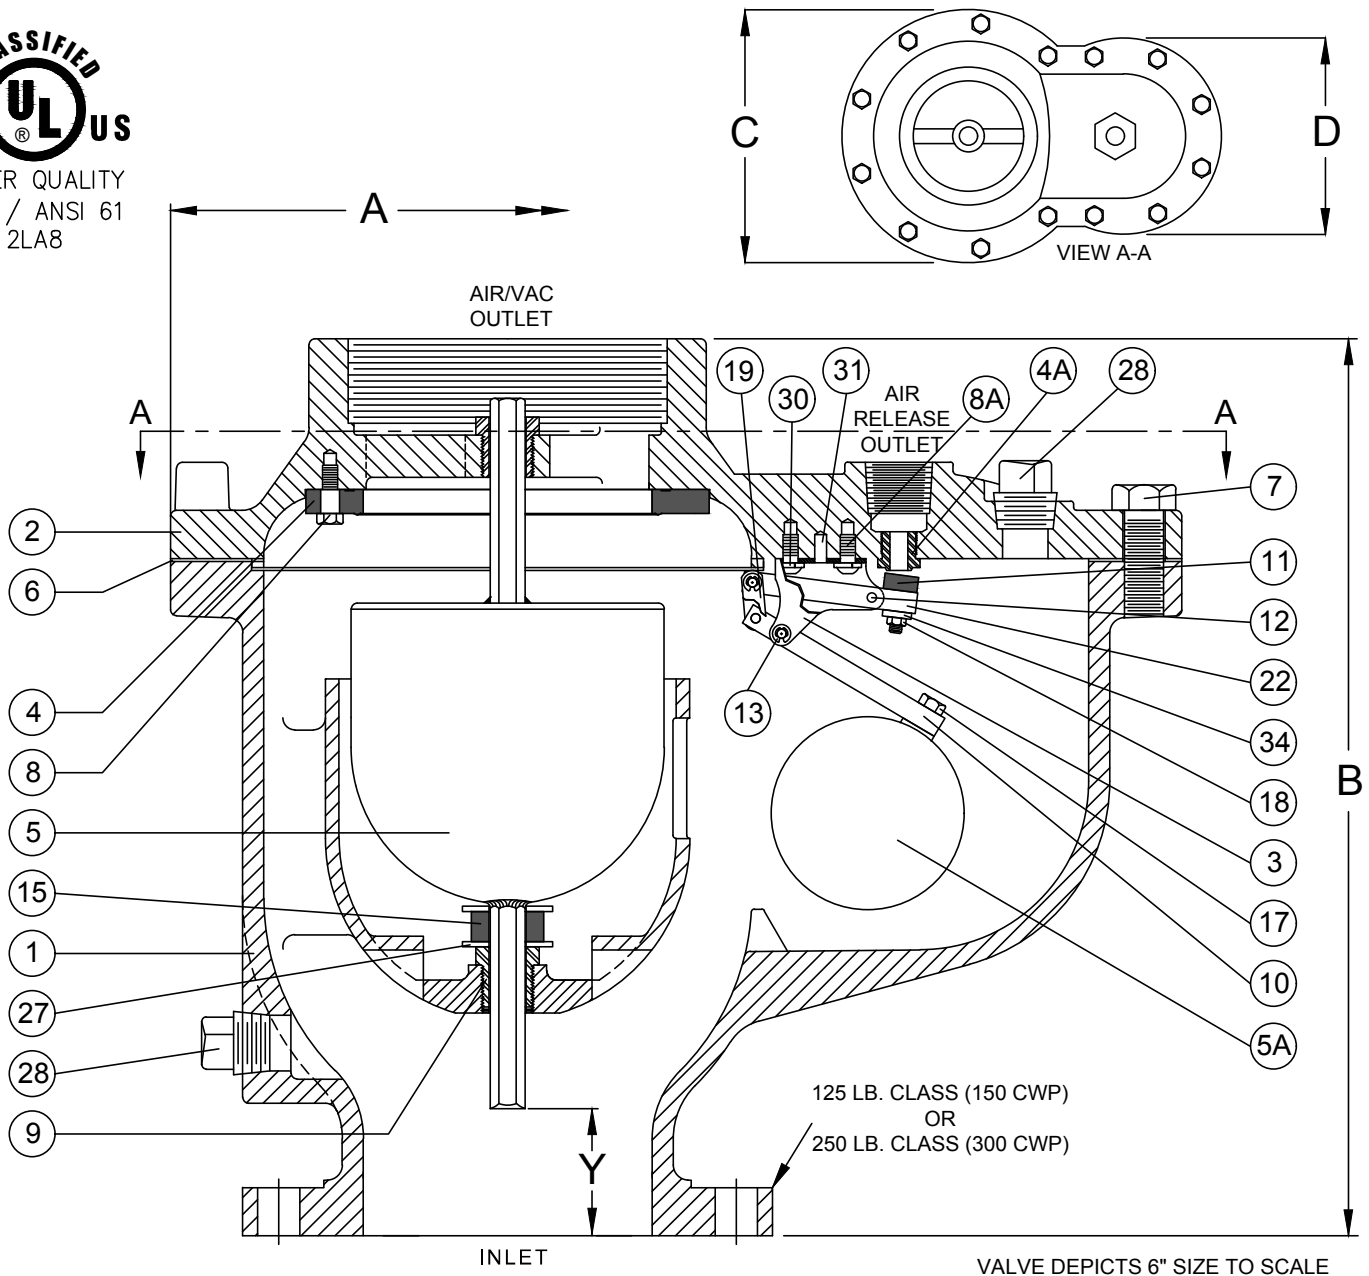

SEE DRAWING NUMBER VM-206C-M FOR STANDARD MATERIALS OF CONSTRUCTION.
SEE DRAWING NUMBER VM-206CDISV-M FOR SUPER VALVE MATERIALS OF CONSTRUCTION.

VALVE SIZE	125 LB. MODEL NO.	250 LB. MODEL NO.	A	B	C	D	Y	INLET SIZE	AIR/VAC OUTLET	AIR RELEASE OUTLET	ORIFICE SIZE	
											150 PSI	300 PSI
6"	206C	256C	21.00	18.75	14.00	10.88	2.38	6" FLG.	6" NPT	1" NPT	3/8	7/32
8"	208C	258C	25.00	21.50	17.00	11.00	0.88	8" FLG.	8" NPT	1" NPT	3/8	7/32

- | | | | |
|---------------|--------------------|-------------------|-----------------------|
| 1 BODY | 6 GASKET | 12 PIVOT PIN | 22 ORIFICE BUTTON ARM |
| 2 COVER | 7 COVER BOLT | 13 RETAINING RING | 27 WASHER (8" ONLY) |
| 3 LEVER FRAME | 8 RETAINING SCREW | 15 CUSHION | 28 PIPE PLUG |
| 4 SEAT | 8A RETAINING SCREW | 17 FLOAT RETAINER | 30 WASHER |
| 4A SEAT | 9 GUIDE BUSHING | 18 LOCK NUT | 18 LOCK NUT |
| 5 FLOAT | 10 FLOAT ARM | 19 LINK | 34 LOCK WASHER |
| 5A FLOAT | 11 ORIFICE BUTTON | 21 LOCATING PIN | |

Revised 4-28-17 (REV 3)

COMBINATION AIR VALVE WITH THREADED OUTLET

DATE 6-22-10



VALVE AND MANUFACTURING CORP.

DRWG. NO.

VMC-206C