


(METERS OF WATER)

(CUBIC METERS PER HOUR)

MINIMUM RECOMMENDED VELOCITY - 4 FT/S

MAXIMUM RECOMMENDED VELOCITY - 8 FT/S

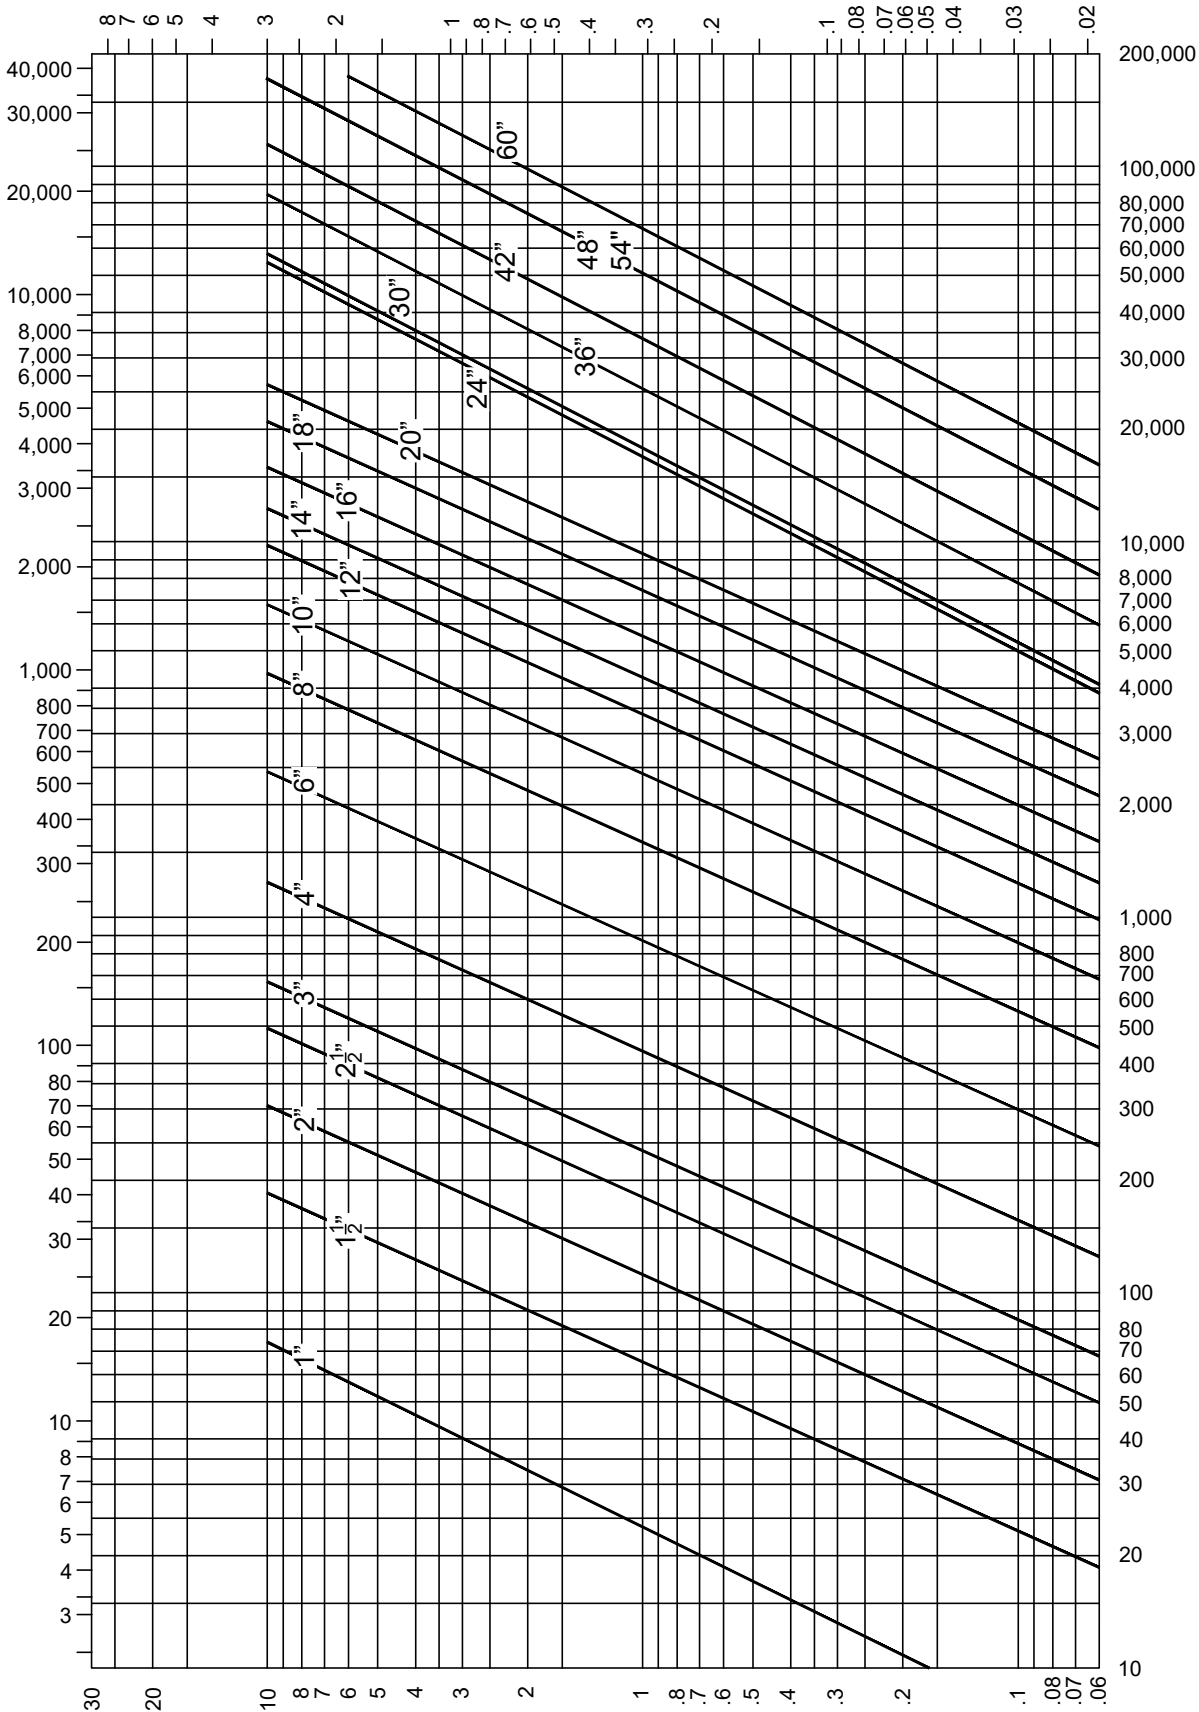

HEAD LOSS IN FEET OF WATER

FLOW OF WATER IN GALLONS PER MINUTE

SIZE	1	1.5	2	2.5	3	4	6	8	10	12	14	16	18	20	24	30	36	42	48	54	60
Cv	37	94	150	240	320	570	1,200	2,070	3,250	4,750	6,150	8,050	10,200	12,600	25,600	28,300	40,700	55,400	91,650	91,650	113,000

REV 5-16-19

HEAD LOSS CHART FOR 5800R CAM-CENTRIC® PLUG VALVES

DATE 4-3-98



VALVE AND MANUFACTURING CORP.

DRWG. NO.

SS-1478