


(METERS OF WATER)

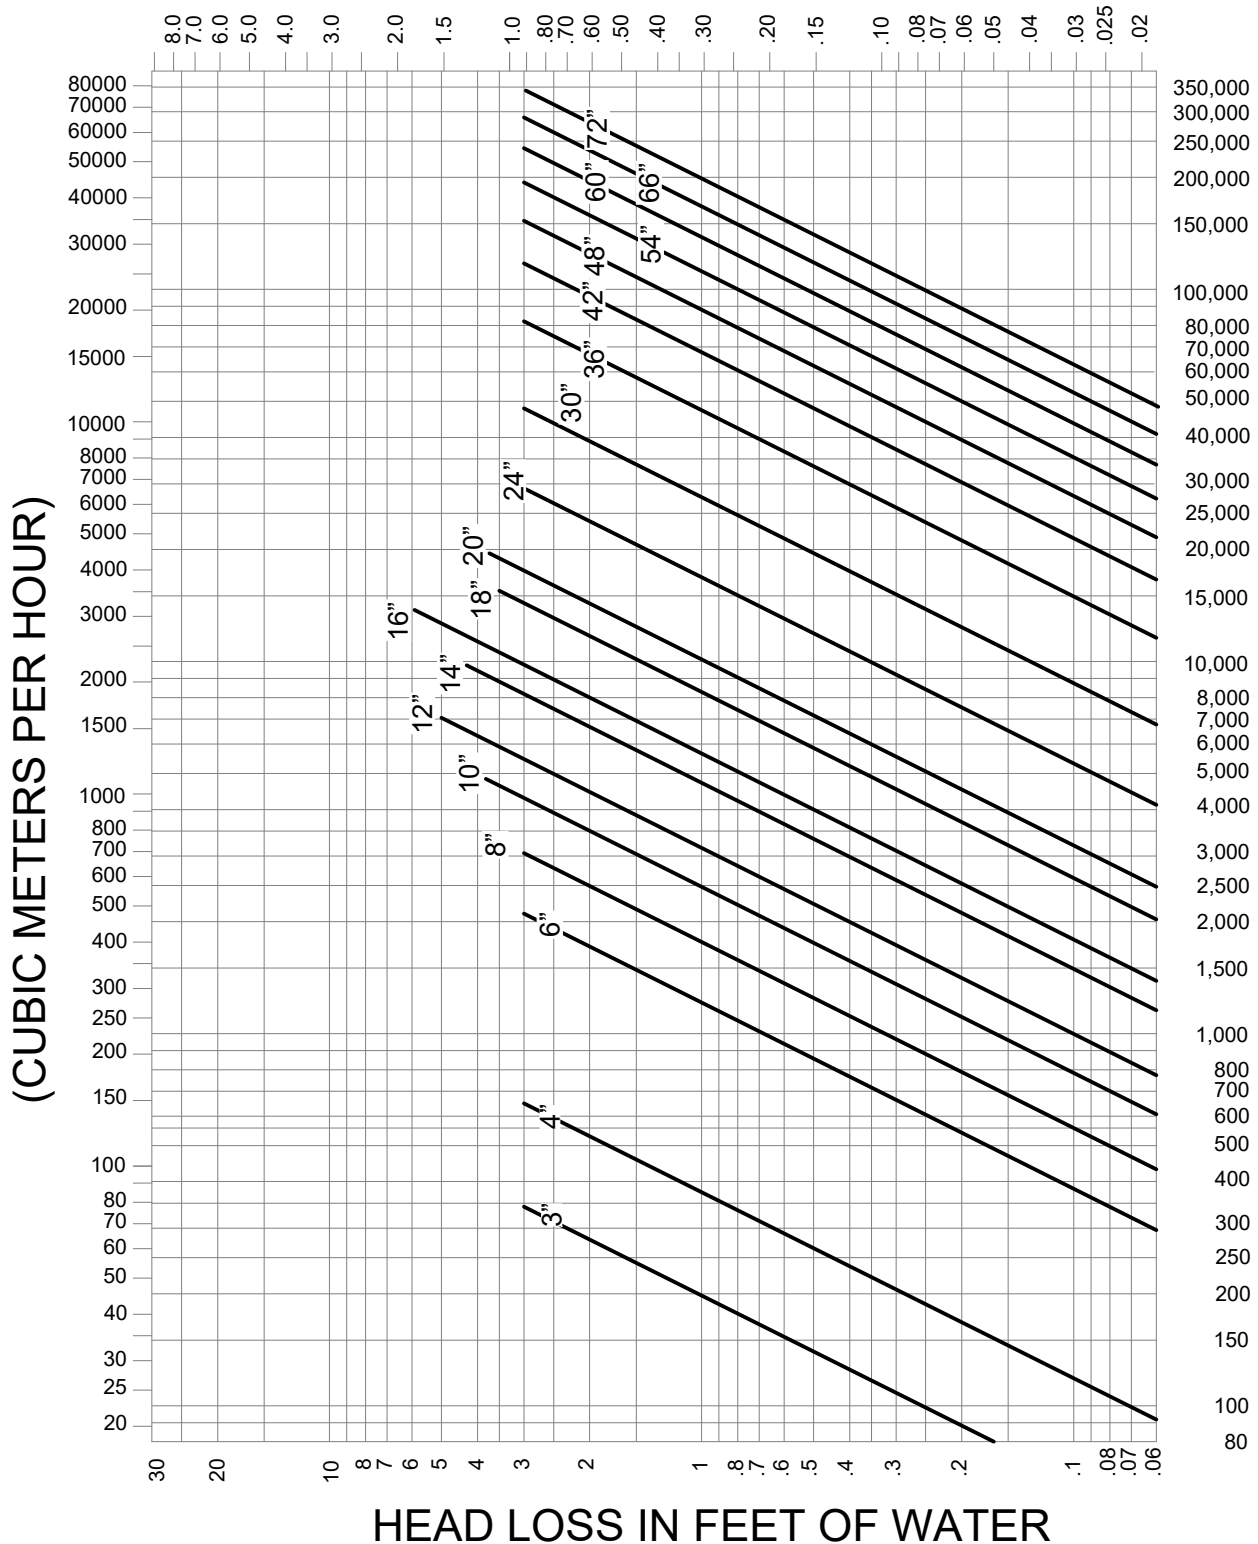

FLOW OF WATER IN GALLONS PER MINUTE

MAXIMUM RECOMMENDED VELOCITY - 8 FT/S (2.43 m/s)

MINIMUM RECOMMENDED VELOCITY - 4 FT/S (1.22 m/s)

Cv VALUES & HEAD LOSS CHART IS FOR FLOW WITH VALVE ORIENTATED WITH THE SEAT DOWNSTREAM.

REV 7-14-22

HEAD LOSS CHART FOR 5600F FULL-PORT CAM-CENTRIC® PLUG VALVES

DATE 4-7-17



VALVE AND MANUFACTURING CORP.

DRWG. NO.

SS-3749

SIZE	3	4	6	8	10	12	14	16	18	20	24	30	36	42	48	54	60	66	72
Cv	300	570	1,840	2,680	3,770	4,800	7,170	8,600	12,600	15,400	25,600	42,000	72,000	103,000	134,000	170,000	210,000	254,000	302,000