


FLOTECT L6EPB-BS3C  
 WATER LEVEL CONTROL SWITCH  
 SPDT SWITCH  
 RATED 5A @ 125/250 VAC  
 3A INDUCTIVE @ 30 VDC  
 UL and CSA LISTED  
 EXPLOSION PROOF.

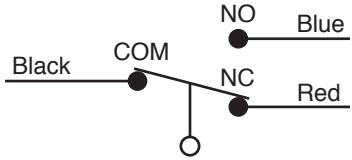

WIRING DIAGRAM

MODEL NO.	RATED PRESSURE	INLET SIZE	OUTLET SIZE	ORIFICE SIZE	A	B	C
38P/WLCS	150 psig (10 bar)	2" (50 mm)	1/2" (13 mm)	3/16" (5 mm)	15 5/16" (389 mm)	16 1/4" (413 mm)	7" (179 mm)
38P.2/WLCS	75 psig (5 bar)	2" (50 mm)	1/2" (13 mm)	5/16" (8 mm)	15 5/16" (389 mm)	16 1/4" (413 mm)	7" (179 mm)
45P/WLCS	150 psig (10 bar)	2" (50 mm)	1" (25 mm)	23/64" (9 mm)	17 9/16" (446 mm)	17 1/2" (444 mm)	9 1/2" (241 mm)
45P.3/WLCS	75 psig (10 bar)	2" (50 mm)	1" (25 mm)	1/2" (13 mm)	17 9/16" (446 mm)	17 1/2" (444 mm)	9 1/2" (241 mm)

Revised 1-28-15 (Rev 4)

PRIMING VALVE W/ WATER LEVEL CONTROL SWITCH

DATE 6-25-01

**VAL-MATIC**<sup>®</sup> VALVE AND MANUFACTURING CORP.

DRWG. NO.  
 VM-38P/WLCS